

# A VERSATILE WORKHORSE

TRACK SYSTEMS YOU CAN COUNT ON



**S-TECH 600R**  
Narrow Track Systems for Tractors

**Soucy** 

# NARROW TRACK SYSTEMS FOR TRACTORS

Your high-value crops demand relentless hard work, precision and uncompromising versatility. The S-TECH 600R enables you to keep doing more, better, with two widths of track: 12 in (305 mm) and 16 in (406 mm). No matter the soil conditions or the intensity of the work, this system is designed to adapt to your fields and your needs.




## INCREASE YOUR GROUND CLEARANCE

This track system has been designed to meet speciality crops' needs. For instance, it increases the tractor's ground clearance by 6 to 14 inches (150 mm to 350 mm), depending on the tractor model and the way tires are mounted. This means you can move through growing crops and better protect your plants throughout operations.


## MATCH TO YOUR ROW SPACE TO THE NEAREST INCH

The S-TECH 600R is built to suit you and not the other way around. The technology of this track system allows you to adjust the width to your row spacing, from 59 to 89 inches (1,500 mm to 2,250 mm). No additional attachments are required.

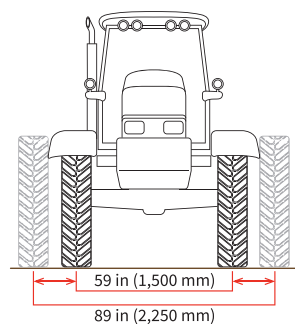

## ENJOY AN OPTIMAL FLOTATION

The ground contact area of the S-TECH 600R is up to 4 times greater than tires of the same width. This gain enables you to reduce soil compaction and increase crop production. It also means that you will get a constant access to your field, even in wet conditions.

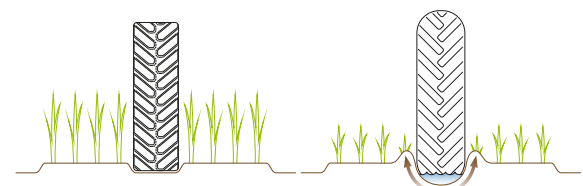

## BE MORE PRODUCTIVE

With the highly specialized and unique subframe coupled with the adaptation system and the increased traction of the tracks, the S-TECH 600R creates a stronger, more stable and efficient tractor. There is no modification required to your vehicle and the load distribution is better without interfering with the 3-point hitch. Result: increased efficiency, productivity and a greater ROI

# TECHNICAL SPECIFICATIONS

## TRACTOR



### S-TECH 600R

|                                  |   |
|----------------------------------|---|
| <b>A</b>                         | 12 and 16 in   305 and 406 mm   |
| <b>B</b>                         | 82 in   2,085 mm  |
| <b>C</b>                         | 66 in   1,679 mm  |
| <b>D</b>                         | 42 in   1,054 mm  |
| <b>E</b>                         | 17 in   432 mm  |
| <b>F</b>                         | 11 in   279 mm  |
| <b>G</b>                         | 12 and 16 in   305 and 406 mm   |
| <b>H</b>                         | 72 in   1,839 mm  |
| <b>I</b>                         | 53 in   1,348 mm  |
| <b>J</b>                         | 34 in   863 mm  |
| <b>K</b>                         | 17 in   432 mm  |
| <b>L</b>                         | 11 in   279 mm  |
| <b>Total ground contact area</b> | Per kit of 4 tracks<br>1.70 and 2.27 m <sup>2</sup>   2,640 and 3,520 in <sup>2</sup> |
|                                  |   |

Visit [soucy-track.com](https://soucy-track.com) for all of our track systems' vehicle compatibility details.



## **SUPER AGILE SALES NETWORK TO SERVE YOU QUICKLY AND EFFICIENTLY**

Our extensive network of trusted dealers and distributors makes it possible to better serve farmers all around the world.

Our priority: provide a simple and flexible solution allowing you to get out into the fields at the right time, with a tool you can trust on.

To see all our points of sale or for further information, go to **[soucy-track.com](https://soucy-track.com)**.

Toll-Free  
(Canada/United States)  
**1 877 474-6665**

Email  
[soucy.track@soucy-group.com](mailto:soucy.track@soucy-group.com)

