

**NEW**

# **S-TECH 990**

TRACK SYSTEMS FOR **TRAILERS**

PROTECT YOUR SOIL WITH OUR LATEST TRAILER TRACK SYSTEM.

SUITABLE FOR MANY TYPES OF EQUIPMENT



**Soucy**

# TRACK SYSTEMS FOR TRAILERS

## VERSATILITY, FLOTATION AND STABILITY

Our new trailer track system has been redesigned in collaboration with our users to be easier than ever to use so you can optimize your time in the field. The S-TECH 990 places less rolling resistance on the vehicle thanks to improved weight distribution over a larger ground contact area. At 36 in (914 mm) wide, the track ensures optimal flotation ideal for soft soils. Perfect for farmers looking for a hassle-free track system for their trailers.

### DYNAMIC TENSIONER

The spring tension system clears debris out continuously. The spring contained in the wheel counteracts compression to expel debris as the track system rotates, and without slowing it down.

### ANNUAL MAINTENANCE


The new S-TECH 990 track system requires no daily maintenance. You only need to change oil in hubs every season. No need to worry about greasing the axles every week — and that means more time to spend on the jobs that really matter.

### NARROW PROFILE

The S-TECH 990 track system is narrower than the dual wheels typically used on a trailer. At just 36 in (914.4 mm) wide, versus dual-wheel systems which can be as wide as 55 in (1,397 mm), the S-TECH 990 lets you get considerably closer to trucks for easier unloading. Road transport is also safer thanks to a narrow width.

### VERSATILITY

The bolt-on design allows easy installation on a wide range of trailers and implements, from an air seeder in the spring to a grain cart in the fall.

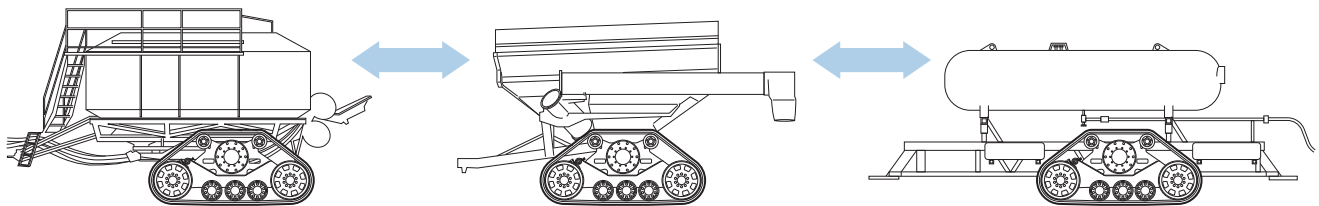

### COMPATIBLE HUB SIZES


Number of bolts	Pilot diameter	Bolt circle diameter
10	8.66 in   220 mm	11.25 in   285 mm
10	11.05 in   281 mm	13.19 in   335 mm
20	17.62 in   452.6 mm	20.125 in   511 mm

# TECHNICAL SPECIFICATIONS

## TRAILER



REF.	S-TECH 990
A	36 in   914 mm
B	116.9 in   2,969 mm
C	52.4 in   1,331 mm
D	33.7 in   856 mm
E	28 in   711 mm
F	14.5 in   368 mm
<b>Total ground contact area</b>	Per kit of 2 tracks 6,084 in <sup>2</sup>   3.93 m <sup>2</sup>
<b>Maximum load capacity</b>	90,000 lb   41,000 kg
<b>Minimum spindle diameter</b>	4.5 in   114 mm

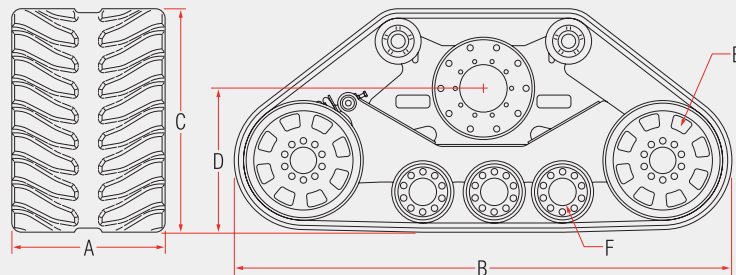

Visit [soucy-track.com](https://soucy-track.com) for all the details on vehicle compatibility with our track systems.



## **SUPER AGILE SALES NETWORK TO SERVE YOU QUICKLY AND EFFICIENTLY**

Our extensive network of trusted dealers and distributors makes it possible to better serve farmers all around the world.

Our priority: provide a simple and flexible solution allowing you to get out into the fields at the right time, with a tool you can trust on.

To see all our points of sale or for further information, go to **[soucy-track.com](https://soucy-track.com)**.

Toll-Free  
(Canada/United States)  
**1 877 474-6665**

Email  
[soucy.track@soucy-group.com](mailto:soucy.track@soucy-group.com)

