



HD4 PRO

THE ULTIMATE HEAVY-DUTY
4 SEASON UTV TRACK SYSTEM

Your
off-road
partner.



A TRUE 4 SEASON KIT


No lateral plastic slide guide

The only high traction heavy-duty system to use wheel guided tracks without the use of a plastic slide. Confidently work with your system all summer long without having to worry about slide meltdowns.

Unbeatable in mud and water, with the greatest resistance to immersion.

Optimal multi-level protection of bearings against water and dirt infiltration for the highest lifespan in the market.

BUILT FOR OPTIMAL DURABILITY - with premium components

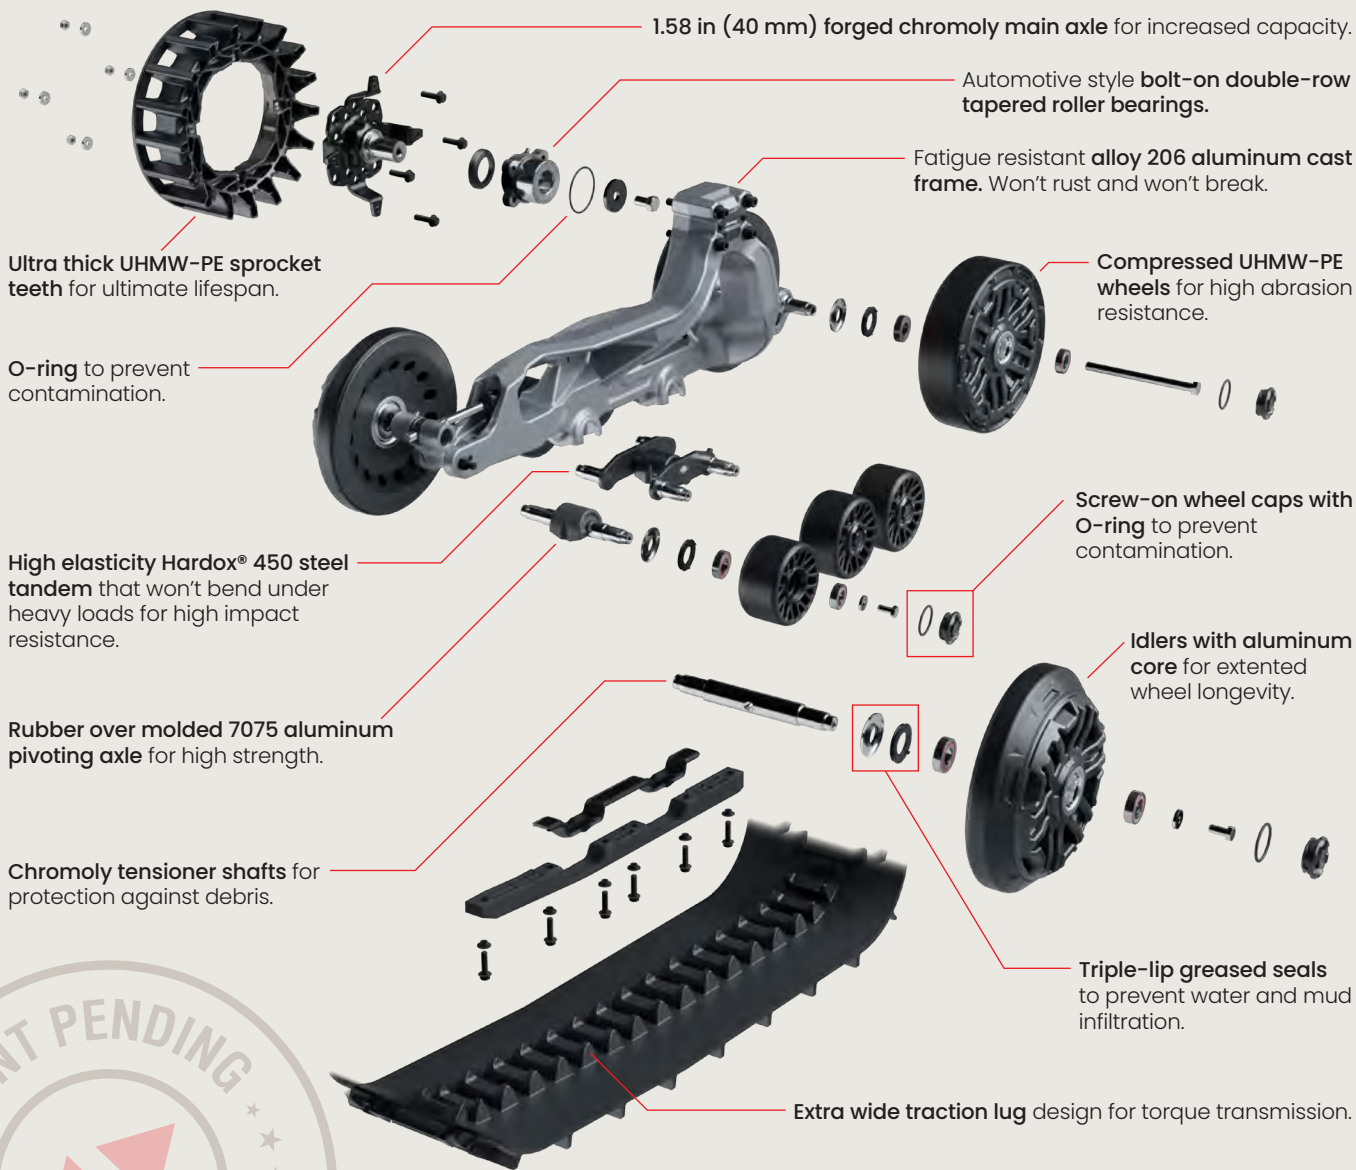

COMFORT WITHOUT COMPROMISE

For Long Working Hours

- Optimized tread design for a smoother ride and noise reduction.
- Thick rubber tire on idler wheels to absorb impacts.
- Shortest turn radius on the market due to very aggressive front track tread.

PAYLOAD CAPACITY

4,000 lb load capacity



The most robust and durable system on the market. It excels in mud and snow with high traction and performs quietly and comfortably on rough terrain.

LOW MAINTENANCE

Robust and Durable Design

Made from premium materials, with optimized design features it ensures minimal maintenance.


- Entirely pressure washer resistant with bearings sealed to withstand harsh conditions.
- Main axle bearing can be easily removed by 4 bolts.
- Easily adjustable track tension with a visual indicator.
- 3-Year Warranty, the Best in class.

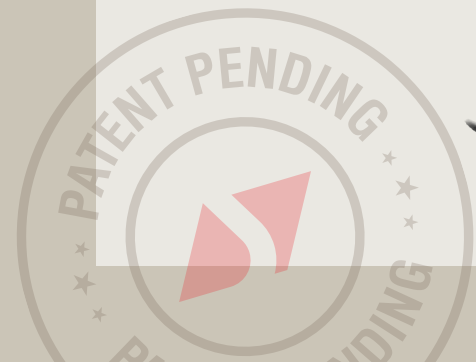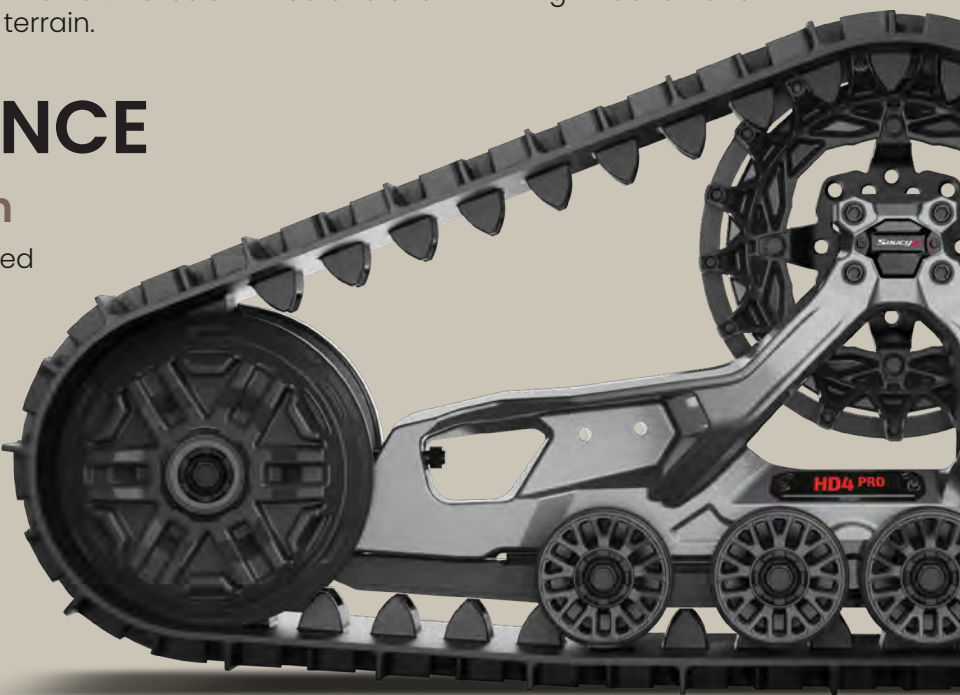

TECHNICAL SPECIFICATIONS





Performance
Lug Height: 1.125 in (28.6 mm)

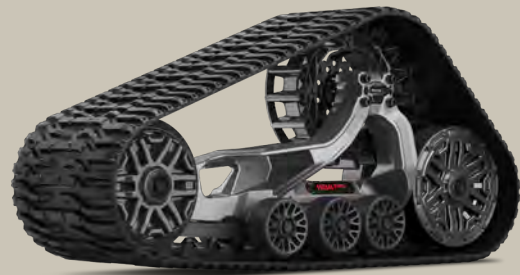

Industrial
Track design minimizes ground damage.

A	Width	Front: 14 in (356 mm) Rear: 15.5 in (394 mm)
B	Length	Front: 42.8 in (1,086 mm) Rear: 50.8 in (1,290 mm)
C	Height	Front: 25.2 in (640 mm) Rear: 25.2 in (641 mm)
D	Offset Width	Front: 8.7 in (221 mm) Rear: 9.5 in (240 mm)
E	Offset Length	Front: 27 in (686 mm) Rear: 33 in (838 mm)
F	Ground Clearance	Front: 16.38 in (416 mm) Rear: 16.5 in (419 mm)
	Ground Clearance Offset (average)	+ 5 in (127 mm)
	Ground Surface	2,761 in ² (1.78 m ²)
	Weight	Front: 144 lb (65.7 kg) Rear: 188 lb (85.2 kg)
	Maintained Speed (average)	2/3
	Compatibility	Bobcat UV34 Kubota RTV-XG and RTV-X Series

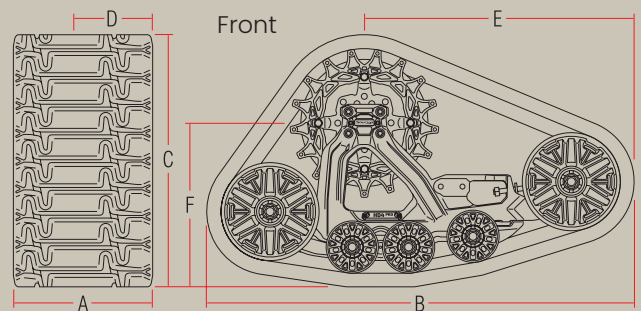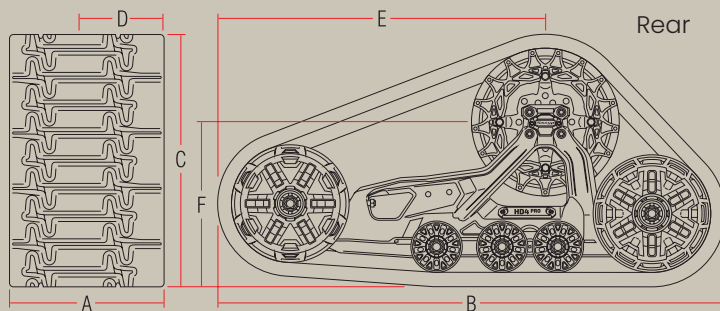

Contact Us
Toll-Free (Canada/United States)
1 855 5TRACKS (1 855 587-2257)
service@soucy-track.com

soucy-track.com

